

MATERIAL AND FINISH:
Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 16A
Voltage rating: 250V AC
Current rating: 20A
Voltage rating: 250V AC

Approvals:  

ORDERING CODE:




CSK-B20-B 2 - H 8 -
C D

C=Terminal block




1.  6.3
2.  4.8
3.  4.0
4.  2.8
5.  6.3

D=Spacing

	Code	XX
D	1	1.2
	2	1.5
	3	1.7
	4	2.0
	5	2.5

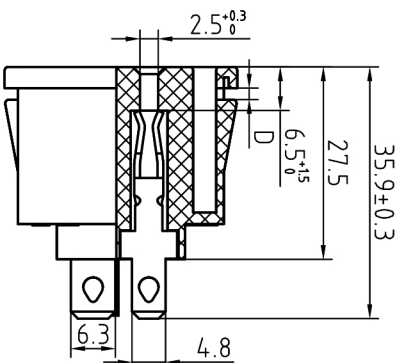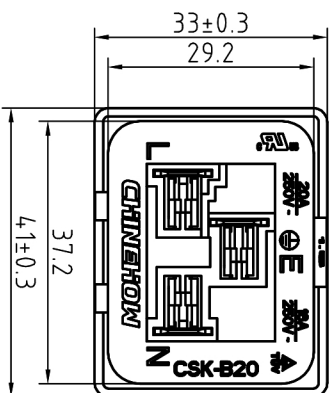

Panel Cut Out

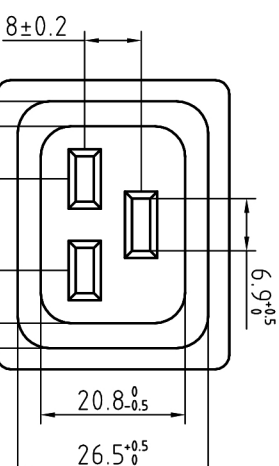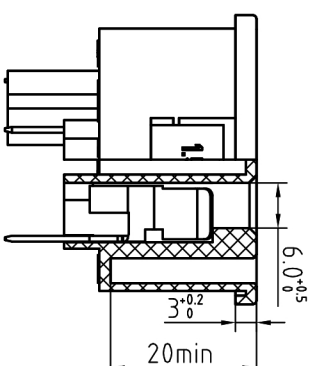

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 0.4
X.X ± 0.3
X.XX ± 0.1

CHINEHOW
Zhejiang Chinehow Technology Co., LTD
PART: 16A/20A IEC 60320 APPL. OUTLET;
Q.C. TERMINALS; SNAP-IN, PANEL MOUNT

CSK-B20-BXX-HX-X

SHEET
1 of 1

RoHS
COMPLIANT

DRAWN BY	DATE:	PART#:	ALL DIMENSIONS FOR REFERENCE ONLY	REV:
CHECK BY	DATE:	SIZE:		
APPR BY	DATE:	SCALE:		